

Fiber Hybrid Adapter

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications

LAN, Data Network
CATV Network
Telecommunication

Specifications



Parameters	Unit	FC/SC/ST/LC
Insertion Loss	dB	≤0.2
Plug and Unplug Force (g/f)		200~600
Durability		1000 Times
Operation Temperature	℃	-40~+85

Ordering Information

Part Number	Description	Photo
AD-LC/FC-SP01	LC-FC Metal Adapter	
AD-LC/SC-SP01	LC-SC Metal Adapter	
AD-LC/ST-SP01	LC-ST Metal Adapter	
AD-FC/SC-SP01	FC-SC Metal Adapter with square flang	

Fiber Hybrid Adapter

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications

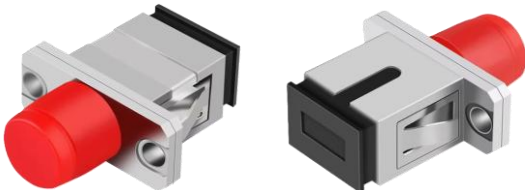
LAN, Data Network
CATV Network
Telecommunication

Specifications



Parameters	Unit	FC/SC/ST/LC
Insertion Loss	dB	≤0.2
Plug and Unplug Force (g/f)		200~600
Durability		1000 Times
Operation Temperature	℃	-40~+85

Ordering Information

Part Number	Description	Photo
AD-FC/SC-SP04	FC Metal -SC Metal Adapter with rectangular flange	
AD-FC/F/SCM-SP03	FC male -SC female Adapter with rectangular flange	
AD-SC/ST-SP01	SC-ST Metal Adapter	
AD-FC/ST-SP01	FC-ST Metal Adapter with rectangular Flange	

Fiber Hybrid Adapter

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications


LAN, Data Network
CATV Network
Telecommunication

Specifications



Parameters	Unit	FC/SC/ST/LC
Insertion Loss	dB	≤0.2
Plug and Unplug Force (g/f)		200~600
Durability		1000 Times
Operation Temperature	℃	-40~+85

Ordering Information

Part Number	Description	Photo
AD-E2000/FC-SP01	E2000/PC-FC/PC Adapter	
AD-E2000/FA-SP01	E2000/APC-FC/APC Adapter	
AD-E2000/SC-SP01	E2000/PC-SC/PC Adapter	
AD-E2000/LC-SP01	E2000/PC-LC/PC Adapter	

Fiber Hybrid Adapter

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications

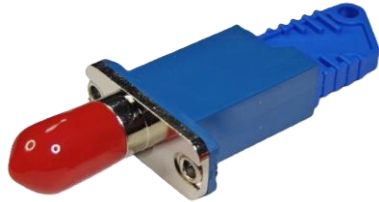
LAN, Data Network
CATV Network
Telecommunication



Specifications

Parameters	Unit	FC/SC/ST/LC
Insertion Loss	dB	≤0.2
Plug and Unplug Force (g/f)		200~600
Durability		1000 Times
Operation Temperature	℃	-40~+85

Ordering Information

Part Number	Description	Photo
AD-E2000/ST-SP01	E2000-ST Adapter	
AD-SMA/FC-SP01	SMA-FC Metal Adapter	
AD-SMA/SC-SP01	SMA-SC Metal Adapter	
AD-SMA/ST-SP01	SMA-ST Metal Adapter	

Fiber Hybrid Adapter

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications

LAN, Data Network
CATV Network
Telecommunication



Specifications

Parameters	Unit	FC/SC/ST/LC
Insertion Loss	dB	≤0.2
Plug and Unplug Force (g/f)		200~600
Durability		1000 Times
Operation Temperature	℃	-40~+85

Ordering Information

Part Number	Description	Photo
AD-SCM/FCF/SM-SP01	SC/UPC Male-FC/UPC Female Single Mode adapter	
AD-SAF/SAM/SM-SP01	LC/APC Male-SC/APC Female Single Mode adapter	
AD-SCM/STF/SM-SP01	SC/UPC Male-ST/UPC Female Single Mode adapter	
AD-SCM/LCF/SM-SP01	SC/UPC Male-LC/UPC Female Single Mode adapter	

Fiber Hybrid Adapter

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications

LAN, Data Network
CATV Network
Telecommunication

Specifications



Parameters	Unit	FC/SC/ST/LC
Insertion Loss	dB	≤0.2
Plug and Unplug Force (g/f)		200~600
Durability		1000 Times
Operation Temperature	℃	-40~+85

Ordering Information

Part Number	Description	Photo
AD-SAM/LAM/SM-SP01	SC/APC Male-LC/APC Male Single Mode adapter	
AD-SAM/LCM/SM-SP01	SC/APC Male-LC/UPC Male Single Mode adapter	
AD-FCM/SCF/SM-SP01	FC/UPC Male-SC/UPC Female Single Mode adapter	
AD-FCM/STF/SM-SP01	FC/UPC Male-ST/UPC Female Single Mode adapter	

Fiber Hybrid Adapter

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications

LAN, Data Network
CATV Network
Telecommunication

Specifications



Parameters	Unit	FC/SC/ST/LC
Insertion Loss	dB	≤0.2
Plug and Unplug Force (g/f)		200~600
Durability		1000 Times
Operation Temperature	℃	-40~+85

Ordering Information

Part Number	Description	Photo
AD-FCM/LCM/SM-SP02	FC/UPC Male-LC/UPC Male Single Mode adapter	
AD-FAM/LAM/SM-SP02	FC/APC Male-LC/APC Male Single Mode adapter	
AD-SCF/LCM/SM-SP01	LC/UPC Male-SC/UPC Female Single Mode adapter	
AD-FAF/FCM/SM-SP01	LC/UPC Male-FC/UPC Female Single Mode adapter	

Fiber Hybrid Adapter

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications

LAN, Data Network
CATV Network
Telecommunication



Specifications

Parameters	Unit	FC/SC/ST/LC
Insertion Loss	dB	≤0.2
Plug and Unplug Force (g/f)		200~600
Durability		1000 Times
Operation Temperature	℃	-40~+85

Ordering Information

Part Number	Description	Photo
AD-FCF/SMAF/SM-SP01	LC/UPC Male-ST/UPC Female Single Mode adapter	
AD-FCF/SMAF/SM-SP02	ST/UPC Male-SC/UPC Female Single Mode adapter	
AD-STF/SMAF/SM-SP03	ST/UPC Male-LC/UPC Female Single Mode adapter	
AD-STF/SMAF/SM-SP04	ST/UPC Male-FC/UPC Female Single Mode adapter	

Fiber Hybrid Adapter

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications

LAN, Data Network
CATV Network
Telecommunication



Specifications

Parameters	Unit	FC/SC/ST/LC
Insertion Loss	dB	≤0.2
Plug and Unplug Force (g/f)		200~600
Durability		1000 Times
Operation Temperature	℃	-40~+85

Ordering Information

Part Number	Description	Photo
AD-FCF/SMAM/SM-SP01	SMA905 Male-FC/UPC Female Single Mode adapter	
AD-FCM/SMAF/SM-SP01	FC/UPC Male-SMA905 Female Single Mode adapter	