


Full Circulating Polarization Insensitive Optical Circulator 1310, 1550, 1650, 1750nm

Specifications

Parameters	Unit	3 Port	4 Port
Wavelength Range	nm	1310±30 or 1550±30, 1650±30, 1750±30	
Isolation	dB	≥40	
Insertion Loss (P1 → P2 → P3 → P1)	dB	≤1.3 (Typ. 1.0)	---
Insertion Loss (P1 → P2 → P3 → P4 → P1)	dB	---	≤1.3 (Typ. 1.0)
PDL	dB	≤0.2	
PMD	ps	≤0.2	
Return Loss	dB	≥50	
Directivity	dB	≥50	
Cross Talk	dB	≥50	
Power Handling	mW	500	
Fiber Type		SMF-28e	
Operating Temperature (T _{op})	°C	-5 ~ +70	
Storage Temperature	°C	-40 ~ +85	
Dimensions	mm	100×80×10	

Package Dimensions

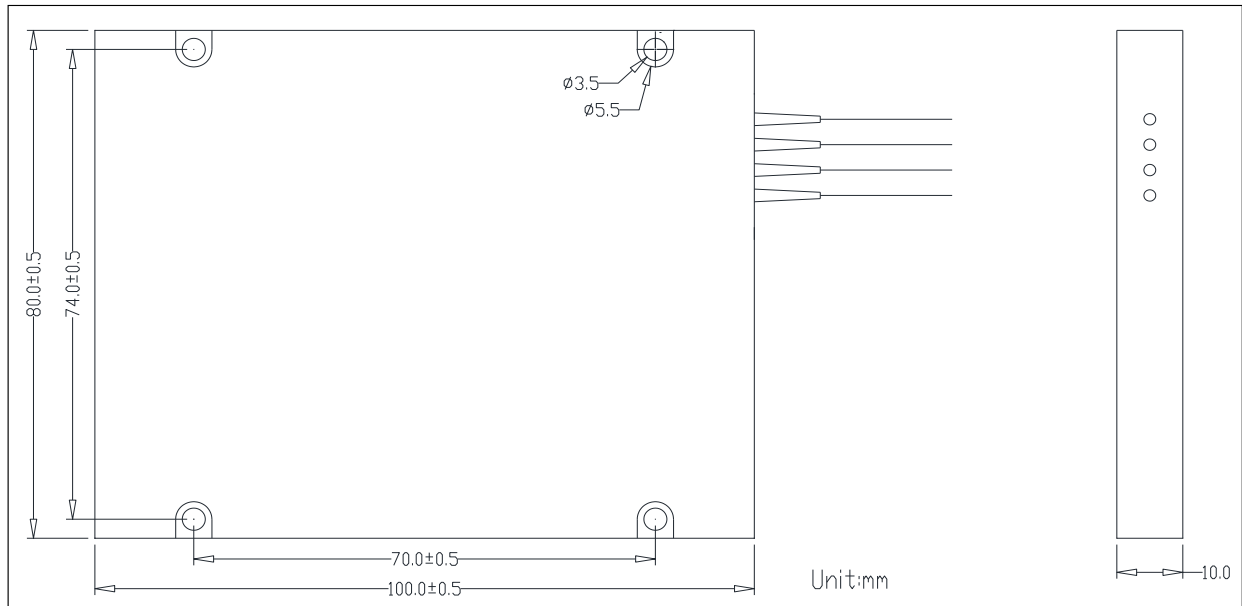

Ordering Information

CIR- ①-②-③③③③-④④④④-⑤-⑥-⑦⑦-⑧⑧⑧⑧⑧⑧⑧⑧

①	Port	3=3 Port; 4=4 Port;
②	Circulating Type	F=Full Circulating;
③	Wavelength	1310; 1550; 1650; 1750;
④	Pigtail Type	250=250µm Fiber; 900=900µm Loose Tube; 3mm=3mm Loose Tube;
⑤	Fiber Length	1=1m;
⑥	Fiber Type	1=SMF-28e;
⑦	Connector	NE=None; FA=FC/APC; FC=FC/UPC; SA=SC/APC; SC=SC/UPC; XX=Other;
⑧	Package Size	100x80x10;