

Optical Fiber Adapter (FC, SC, LC, ST, MU, E2000)

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications

LAN, Data Network
CATV Network
Telecommunication



Specifications

Parameters	Unit	FC, SC, LC, ST, MU
Insertion Loss	dB	≤0.2
Plug and Unplug Force	g/f	200~600
Lifetime	time	≥1000
Operation Temperature	°C	-40~+85

Ordering Information

Part Number	Description	Photo
AD-FC/SM-SP01	FC/PC adaptor (D-type)	
AD-FA/SM-SP01	FC/APC adaptor (D-type)	
AD-FC/SM-SP02	FC/PC adaptor (d-type)	
AD-FC/SM-SP03	FC/PC adaptor (Solid)	

Optical Fiber Adapter (FC, SC, LC, ST, MU, E2000)

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications

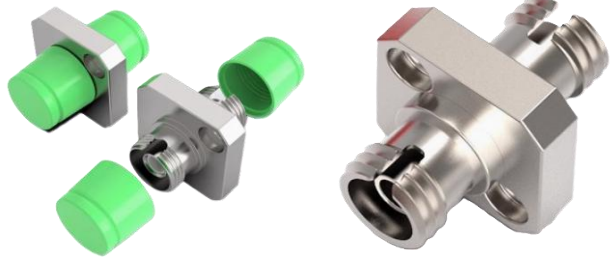
LAN, Data Network
CATV Network
Telecommunication



Specifications

Parameters	Unit	FC, SC, LC, ST, MU
Insertion Loss	dB	≤0.2
Plug and Unplug Force	g/f	200~600
Lifetime	time	≥1000
Operation Temperature	°C	-40~+85

Ordering Information

Part Number	Description	Photo
AD-FA/SM-SP03	FC/APC adaptor (Solid)	
AD-FC/SM-SP04	FC/PC adaptor (2 body)	
AD-FA/SM-SP04	FC/APC adaptor (2 body)	
AD-FC/SM-SP05	FC/PC adaptor (Oval)	

Optical Fiber Adapter (FC, SC, LC, ST, MU, E2000)

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications

LAN, Data Network
CATV Network
Telecommunication



Specifications

Parameters	Unit	FC, SC, LC, ST, MU
Insertion Loss	dB	≤0.2
Plug and Unplug Force	g/f	200~600
Lifetime	time	≥1000
Operation Temperature	°C	-40~+85

Ordering Information

Part Number	Description	Photo
AD-FA/SM-SP05	FC/APC adaptor (Oval)	
AD-FC/SM-SP06	FC/PC adaptor (Rectangular)	
AD-FC/SM/F/M-SP07	FC/PC female to FC/PC male adaptor	
AD-FA/SM/F/M-SP07	FC/APC female to FC/APC male adaptor	

Optical Fiber Adapter (FC, SC, LC, ST, MU, E2000)

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications


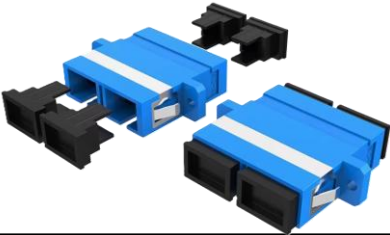

LAN, Data Network
CATV Network
Telecommunication



Specifications

Parameters	Unit	FC, SC, LC, ST, MU
Insertion Loss	dB	≤0.2
Plug and Unplug Force	g/f	200~600
Lifetime	time	≥1000
Operation Temperature	°C	-40~+85

Ordering Information

Part Number	Description	Photo
AD-FA/FC/SM/F/M-SP07	FC/APC female to FC/PC male adaptor	
AD-SC/SM-SP01	SC/PC Simplex Adapter	
AD-SC/SM-SP02	SC/PC Duplex Adapter	
AD-SC/SM-SP03	SC/APC Simplex Adapter	

Optical Fiber Adapter (FC, SC, LC, ST, MU, E2000)

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications


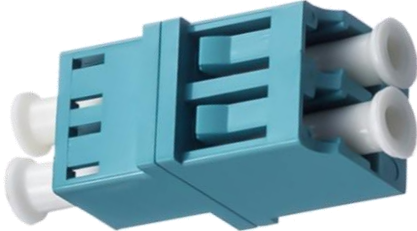
LAN, Data Network
CATV Network
Telecommunication



Specifications

Parameters	Unit	FC, SC, LC, ST, MU
Insertion Loss	dB	≤0.2
Plug and Unplug Force	g/f	200~600
Lifetime	time	≥1000
Operation Temperature	°C	-40~+85

Ordering Information

Part Number	Description	Photo
AD-LC/SM-SP01	LC/PC simplex adapter	
AD-LC/SM-SP01M	LC/PC simplex adapter/Metal	
AD-LC/OM3-SP02	LC/PC MMF OM3 Duplex adapter	
AD-LC/OM5-SP02	LC/PC MMF OM5 Duplex adapter	

Optical Fiber Adapter (FC, SC, LC, ST, MU, E2000)

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications

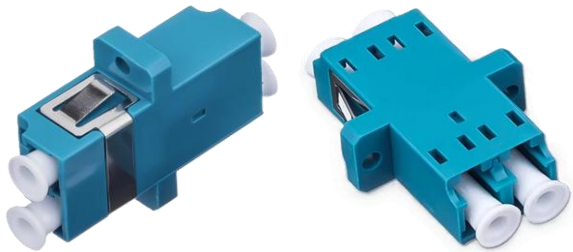
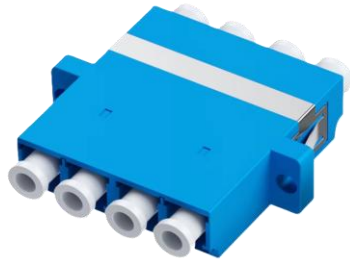
LAN, Data Network
CATV Network
Telecommunication



Specifications

Parameters	Unit	FC, SC, LC, ST, MU
Insertion Loss	dB	≤0.2
Plug and Unplug Force	g/f	200~600
Lifetime	time	≥1000
Operation Temperature	°C	-40~+85

Ordering Information

Part Number	Description	Photo
AD-LC/SM-SP02	LC/PC SMF Duplex adapter	
AD-LC/SM-SP02M	LC/PC SMF Duplex adapter/Metal	
AD-LA/SM-SP02	LC/APC SMF Duplex adapter	
AD-LC/SM-SP04	LC/PC SMF quad adapter	

Optical Fiber Adapter (FC, SC, LC, ST, MU, E2000)

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications


LAN, Data Network
CATV Network
Telecommunication



Specifications

Parameters	Unit	FC, SC, LC, ST, MU
Insertion Loss	dB	≤0.2
Plug and Unplug Force	g/f	200~600
Lifetime	time	≥1000
Operation Temperature	°C	-40~+85

Ordering Information

Part Number	Description	Photo
AD-LA/SM-SP04	LC/PC SMF quad adapter	
AD-ST/SM-SP01	ST/PC Simplex adapter	
AD-ST/SM-SP01	ST SM connector	
AD-ST/SM-SP02	ST SM connector	

Optical Fiber Adapter (FC, SC, LC, ST, MU, E2000)

Features

Low Insertion Loss
High Repeatability
Easy Operation

Applications

LAN, Data Network
CATV Network
Telecommunication



Specifications

Parameters	Unit	FC, SC, LC, ST, MU
Insertion Loss	dB	≤0.2
Plug and Unplug Force	g/f	200~600
Lifetime	time	≥1000
Operation Temperature	°C	-40~+85

Ordering Information

Part Number	Description	Photo
AD-MU/SM-SP01	Adaptor- MU Simplex adapter Ceramic Zirconia Sleeve	
AD-MU/SM-SP02	Adaptor- MU duplex adapter	
AD-E2000A/SM-SP01	E2000/APC adaptor	
AD-E2000/SM-SP02	E2000/PC adaptor	