Silicone Spiral Wrapping Tube

| Rev A | 2026-11

Features

- High temperature resistance (-30-260°C as listed)
- Acid / alkali resistant, corrosion resistant, anti-aging
- Reusable, easy to install and remove, custom cut available

Applications

- Optical fiber / network cable bundling, telecom room
- Automotive, new energy wiring and charging piles
- Industrial equipment, medical, food, home wiring


Specifications

Parameters	Unit	Values
Material	--	A-grade silicone rubber
Operating Temperature	℃	-30~260
Storage Temperature	℃	-40~260
Inner Diameter	mm	0.5~12
Outer Diameter	mm	1.0~15
Wall Thickness	mm	0.5 / 0.75 / 1.0 / 1.5 / 2.0
Color	--	White / Black / Orange
Length	m	1 m per unit price
Spiral Pitch	--	Customizable
Winding Direction	--	Customizable
Cutting Service	--	Available
Installation	--	Wrap around the fiber / cable / bundle
Reusability	--	Reusable

* Dimensions are ID x OD; all sizes are per 1 m.

* Color does not affect performance.

Product Appearance

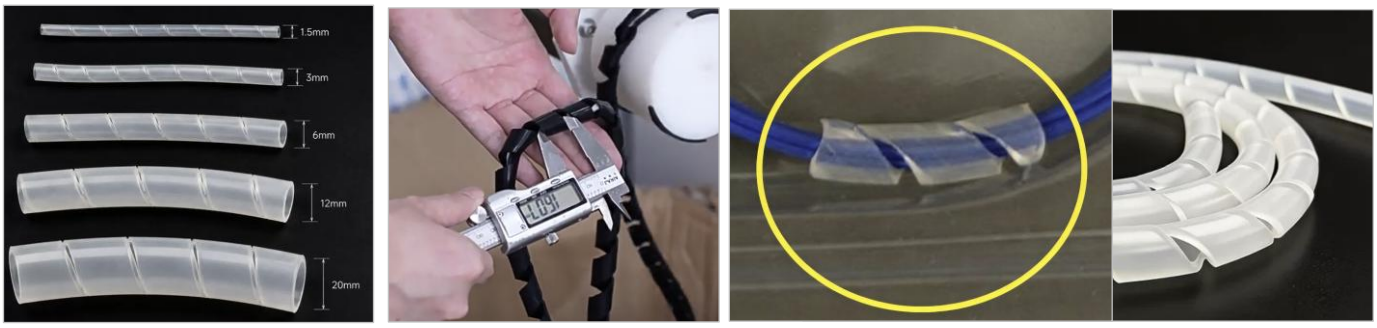

Ordering Information

SSWT- ①①-②②②②②②②②-③③③-④-⑤

①	Color	WH=White; BK=Black; OR=Orange;
②	Size (ID x OD)	1.0x2.0; 1.5x3.0; 1.5x3.5; 2.0x3.0; 2.0x4.0; 2.5x4.0; 2.7x4.7; 3.0x5.0; 4.0x6.0; 5.0x7.0; 6.0x8.0; 6.0x9.0; 7.0x9.0; 7.0x10.0; 8.0x10.0; 8.0x11.0; 9.0x11.0; 10.0x12.0; 12.0x15.0; 14.0x18.0;
③	Wall Thickness	0.5; 0.75; 1.0; 1.5; 2.0;
④	Length	1=1m; X=Specify;
⑤	Spiral Pitch	S=Standard; X=Specify;